

# XVF3800 VOICE PROCESSOR

CRYSTAL CLEAR VOICE CAPTURE FOR COLLABORATION APPLICATIONS

RELIABLE, FAST TIME-TO-MARKET, COST-OPTIMISED SOLUTION THAT ENABLES MICROSOFT TEAMS™ AND ZOOM™ CERTIFICATION FOR ENTERPRISE AND CONSUMER VOICE CONFERENCING PLATFORMS

With remote working on the upward trend, the demand for high-quality, reliable and cost-effective collaboration solutions has increased significantly. Capturing voice clearly and accurately to ensure efficient communication is essential for conferencing platforms to deliver the near face-to-face experience.

Unlike human ears automatically filtering out background noise, microphones capture the whole soundscape including the surrounding and unwanted noise such as acoustic coupling and room reverberation. That's where XMOS cutting-edge algorithms come in.

The XVF3800 4-mic voice processor incorporates state of the art audio algorithms delivering high quality voice in the most challenging of environments. Multi-adaptive beamforming, echo cancellation, de-reverberation and noise suppression ensures outstanding double talk performance and an optimised voice signal ideal for collaboration applications requiring Teams and Zoom certifications.

The addition of XVF3800 will provide your customers with a cost effective high-clarity voice solution with minimal integration effort. XVF3800 delivers a fast time-to-market conferencing solution ideal for enterprise and consumer conferencing platforms.



## FEATURE HIGHLIGHTS

The XVF3800 voice processor includes microphone interfacing, voice processing and control, allowing you to fully optimise voice performance based on the specific product acoustics.

### ACOUSTIC ECHO CANCELLATION (AEC)

Acoustic Echo Cancellation removes echo from the microphone audio input while reducing far-end echoes enabling XVF3800 to extract clear voice signals even with high-volume speaker output.

### NOISE SUPPRESSION

Noise suppression nulls stationary and non-stationary diffuse noise sources, for example air-conditioning and road noise where the frequency characteristics don't change over time. This enables accurate, consistent voice capture.

### ADAPTIVE MULTIPLE BEAMFORMERS

The free-running and focused beamformers track both stationary and non-stationary voice sources, identifying the direction of arrival (DoA) and isolating the voice of interest to enhance double talk and dereverberation performance.

### AUTOMATIC GAIN CONTROL (AGC)

The configurable and flexible Automatic Gain Control tunes the output channels for optimal voice communication. Ideal for passing Teams and Zoom certifications.

## DEV KIT



XK-VOICE-SQ66

## APPLICATIONS



ENTERPRISE  
CONFERENCING



VIDEO  
BARS




PORTABLE  
SPEAKERPHONES



COLLABORATIVE  
DISPLAY

## BLOCK DIAGRAM

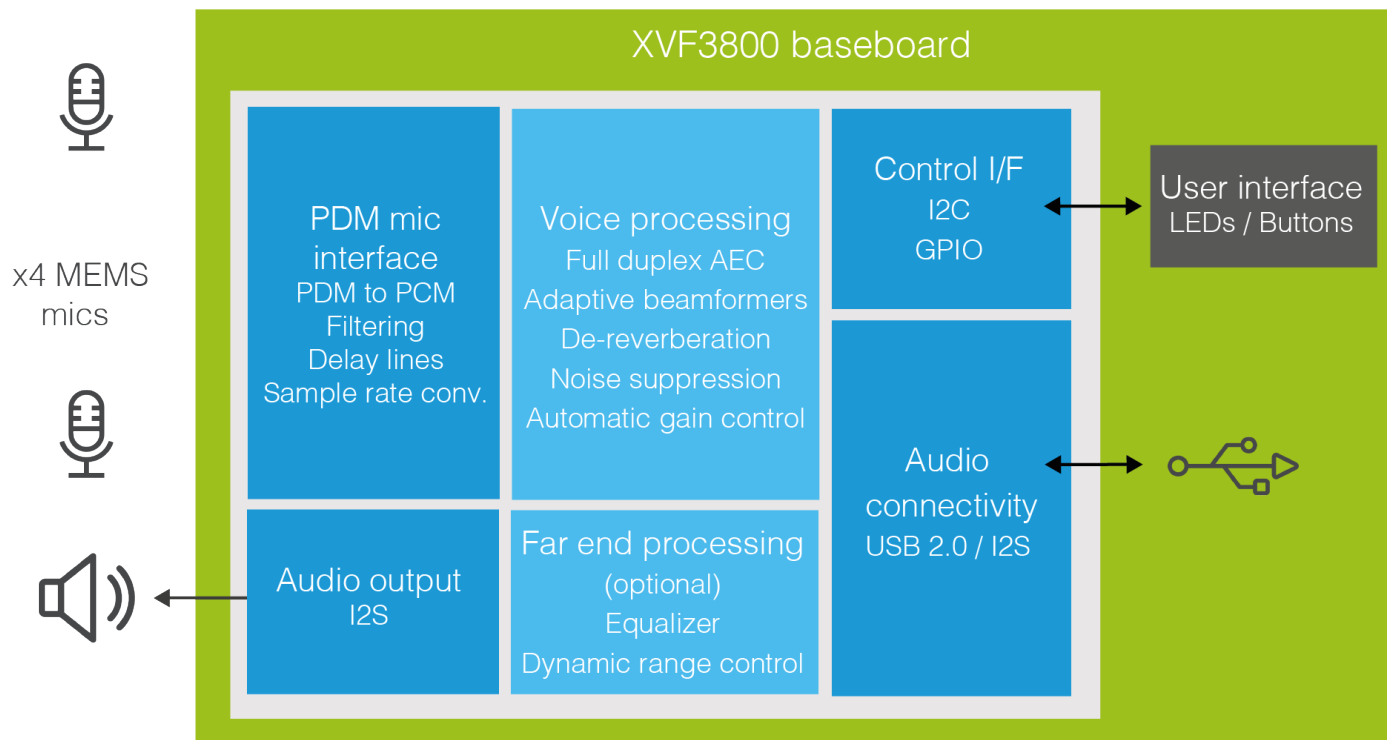

## VOICE PROCESSOR | XVF3800

### PACKAGE

60-Pin QFN, 0.4mm pitch

### VOICE PROCESSING

Acoustic Echo Cancellation  
Adaptive Beamformers  
Noise Suppression  
Automatic Gain Control

### MICROPHONE INTERFACE

4 x digital PDM microphone interface  
100mm linear mic array, 33mm inter-mic spacing  
90mm square mic array, 43mm inter-mic spacing

### HOST INTERFACE OPTIONS

High speed USB2.0 device supporting USB Audio  
Class 2.0; 16kHz or 48kHz sample rate  
I2S audio interface; 16kHz or 48kHz sample rate

### AUDIO OUTPUT OPTIONS

I2S output to DAC; 16kHz or 48kHz PCM

### CONTROL INTERFACE

USB Control Interface  
I2C Control Interface

### VOICE PROCESSOR

XVF3800

For further information please contact [sales@xmos.com](mailto:sales@xmos.com)

### DEV KIT

XK-VOICE-SQ66

[xmos.ai/XVF3800](https://xmos.ai/XVF3800)